



TRWC 1000

Re-inforced Wraparound Closure For Pressurised Cables

Application

The TRWC 1000 Closure takes full advantage of the proven heat-shrinkable technology and is ideal for protecting of pressurised copper joints in telecommunication networks. Suitable applications include a comprehensive range of cable types, aerial, direct burial and ducted systems for maintenance and implementation projects.


The reinforced composite material structure, together with hot melt adhesive and a metal canister offers superior split resistance and mechanical strength during and after installation. The canister further insulates and shapes the jointing bundle while allowing a joint capacity of up to 4800 pairs. A range of interchangeable air fittings can be incorporated into the closure and come supplied as a standard with the kit.

Rebok kits with hot melt adhesive, allows for up to 4 cables to be branched off at each end of the closure. Thermochromatic indicators assist the user during the shrinkage procedure to ensure optimum installation under the most severe conditions.

Features

- The reinforced composite material has a high split resistance.
- Fast and easy installation.
- Thermo-chromatic paint for visual indication while shrinking.
- Hot-melt adhesive specifically designed for pressurised closure applications.
- Reinforced metal canister for enhanced structural strength.

TRWC 1000 Re-inforced Wraparound Closure

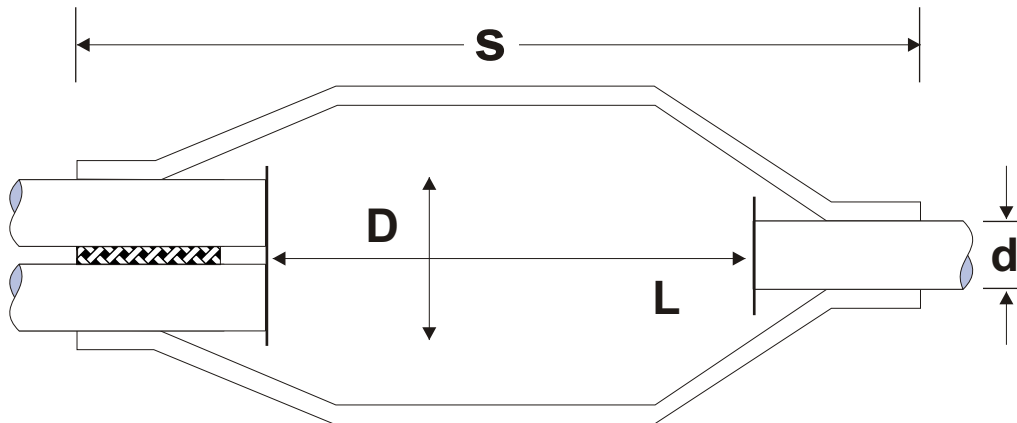

Description	Splice Bundle Max. D	Single cable dia min. d	Sheath opening nom. L	Max. Recommended sum of branch cable dia.			Branch- off kit
				2 out	3 out	4 out	
TRWC 1000 - 62/15-350	62	15	350	52	40	-	Rebok 66
TRWC 1000 - 62/15-500	62	15	500	52	40	-	Rebok 66
TRWC 1000 - 62/15-650	62	15	650	52	40	-	Rebok 66
TRWC 1000 - 92/30-500	92	30	500	82	70	58	Rebok 66
TRWC 1000 - 92/30-650	92	30	650	82	70	58	Rebok 66
TRWC 1000 - 122/38-500	122	38	500	112	100	88	Rebok 66
TRWC 1000 - 122/38-650	122	38	650	112	100	88	Rebok 66
TRWC 1000 - 122/38-720	122	38	720	112	100	88	Rebok 66
TRWC 1000 - 160/55-650	160	55	650	142	130	118	Rebok 77
TRWC 1000 - 160/55-720	160	55	720	142	130	118	Rebok 77
TRWC 1000 - 160/55-900	160	55	900	142	130	118	Rebok 77
TRWC 1000 - 200/65-720	200	65	720	172	160	148	Rebok 77
TRWC 1000 - 200/65-900	200	65	900	172	160	148	Rebok 77