

MECHANICAL CONNECTORS, LUGS & REPAIR SLEEVES

for Medium Voltage Cable Accessories up to 42 kV

Features & benefits

- Wide application range
- Compact design
- Can be used with almost every type of conductor and material
- Torque-controlled shear-head bolts guarantee a good electrical contact
- Easy installation with standard sockets spanner
- Pre-engineered design for perfect fit in medium voltage cable accessories up to 42 kV
- Tested according to IEC 61238-1 class A

General description

Mechanical connectors, lugs and repair sleeves are designed for use in low and medium voltage applications. Only three sizes cover conductor sizes from 25 mm² to 400 mm²

All products consist of a tin-plated body, shear-head bolts and inserts for small conductor sizes.

Body

Connector and lug bodies are made of a high-tensile, tin-plated aluminium alloy. The internal surfaces of the conductor holes are grooved.

Connectors are chamfered at the edges and available with or without oil barrier (as blocked and unblocked types) depending on the application requirements. Lugs are suitable for outdoor and indoor applications and are available with different palm hole sizes.



Contact bolts

Made of a special aluminium alloy, these contact bolts are double shear-head bolts with hexagon heads. The bolts are treated with a highly lubricating agent and equipped with a special contact ring. Contact bolts are irremovable once their heads have been sheared off.



Inserts

Lugs and connectors are provided with inserts for smaller conductors.

These inserts have lengthwise striations and a positioning guide.



Features & Benefits

Functions

of mechanical lugs and connectors

Wide application range can be used for almost every type of conductor and material	Only three sizes cover conductor cross-sections from 25 mm ² to 400 mm ² and
---	--

Bodies made of a high-tensile, tin-plated aluminium alloy Bolts made of special aluminium alloy	Good contact properties Connection between copper and aluminium conductors is possible
--	---

Compact design	Requires little installation space, particularly for large sizes
----------------	--

Conductor connection hole with crosswise and lengthwise grooves	Good electrical performance Conductor oxide film is disrupted
---	--

Centered hole and inserts	Conductors of every size are centered Height of the step between the conductor insulation and connector surface is reduced Same cut-back length even when centering insert is used Wires are not distorted when bolts are tightened
---------------------------	--

Shear bolts with predetermined shear torque, hexagon head and specially shaped contact ring	No torque wrench necessary Head shears off when a specific level of torque is applied High tensile strength
---	---

Lubricated bolts	Reduces friction Converts tightening torque into contact force for maximum effect
------------------	--

No elongation during installation	Easier to design relevant accessories
-----------------------------------	---------------------------------------

Special features of mechanical connectors

Chamfered edges	Suitable for up to 42 kV and adaptable to existing joint designs
-----------------	--

Available with and without oil barrier	Oil stop when used in transition joints
--	---


Special features of mechanical lugs

Long shank	Extra-long for moisture barrier
------------	---------------------------------

Lengthwise seal	For indoor and outdoor applications
-----------------	-------------------------------------

Installation

- Easy and secure installation without special tools
- All it takes to tighten bolts is a wrench and hexagon socket
- Same cut-back length for each type
- Inserts are included
- Shear head bolts with predetermined torque ensure reliable and secure contact
- The use of a support tool is recommended (see accessories) to prevent conductor bending
- Separate installation instructions included with every connector or cable lug


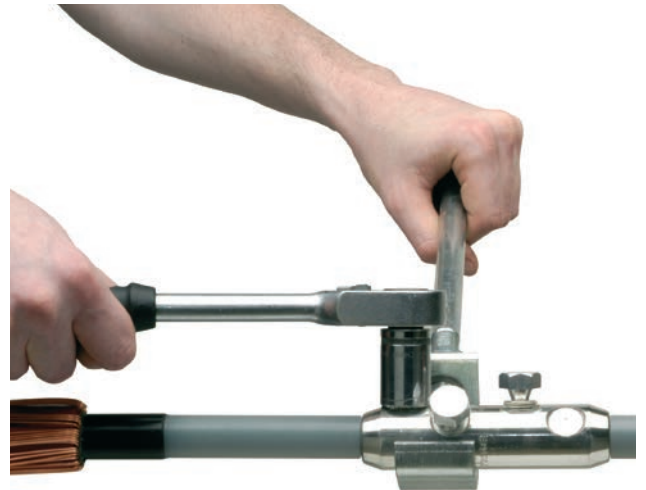


Use in cable accessories

The bolted fittings featured herein were developed especially for use in medium voltage cable accessories up to 42 kV. They may also be used in the 1 kV range. Before using mechanical connectors in cable accessories, confirm that they are suitable for the given application and, if necessary, consult the manufacturer.

Together with bolted connectors for cable accessories, TE Connectivity offers an extensive range of cable accessories tested in accordance with CENELEC HD 629.1 and HD 629.2 standard. The range includes all required connectors.

Further information is available on request.


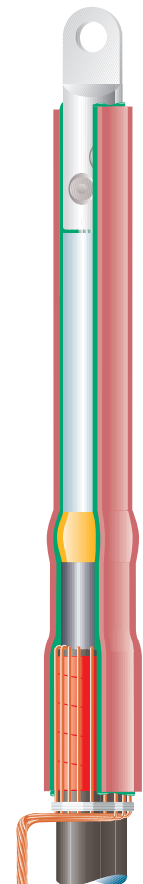
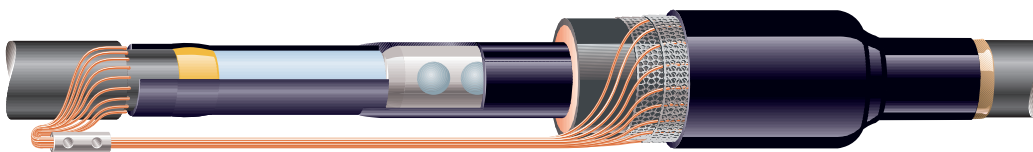


Tested quality

Mechanical connectors and lugs have been tested to IEC 61238-1 class A. Detailed test reports available on request.

Ordering information – Dimensions – Selection tables

Mechanical lugs

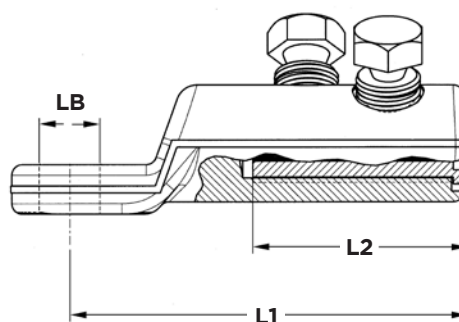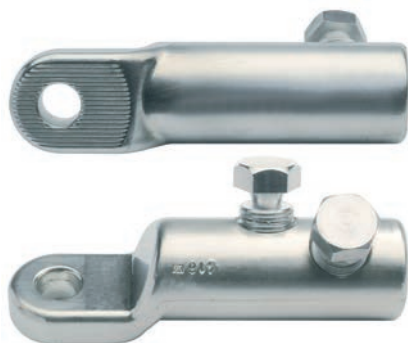

Dimensions

Product reference	Cross-sectional range mm ²	Palm hole diameter mm LB	Dimensions mm				Contact bolts Quantity	Head size AF mm	TCPN
			L1	L2	D1	D2			
BLMT-25/95-13	25-95	13	60	30	24	12.8	1	13	A23668-000
BLMT-25/95-17	25-95	17	60	30	24	12.8	1	13	D10789-000
BLMT-35/150-13	35-150	13	86	35	28	15.8	1	17	F61108-000
BLMT-35/150-17	35-150	17	86	35	28	15.8	1	17	D80047-000
BLMT-95/240-13	95-240	13	112	60	33	20	2	19	E44865-000
BLMT-95/240-17	95-240	17	112	60	33	20	2	19	E01991-000
BLMT-120/300-13	120-300	13	115	65	37	24	2	22	F62708-000
BLMT-120/300-17	120-300	17	115	65	37	24	2	22	E26422-000
BLMT-185/400-13	185-400	13	137	80	42	25.5	3	22	E20798-000
BLMT-185/400-17	185-400	17	137	80	42	25.5	3	22	F55650-000
BLMT-185/400-21	185-400	21	137	80	42	25.5	3	22	F52232-000
BLMT-500/630-13	500-630	13	150	95	50	33	3	27	1951736-3
BLMT-500/630-17	500-630	17	150	95	50	33	3	27	1951736-1
BLMT-500/630-21	500-630	21	150	95	50	33	3	27	1951736-2
BLMT-800-50x56-D21	800	21	202	120	56	36	4	27	2062425-1
BLMT-800-80x40-2D14x40	800	2x14	237	120	56	36	4	27	2062424-1

Selection and application table

Product reference		Application range Conductor type				Cu circular stranded	Cu circular solid	Cu sector stranded
		Al circular stranded	Al circular solid	Al sector stranded	Al sector solid			
BLMT-25/95-XX	Cross-sectional range (mm ²)	25-95	16-95	25-70		16-95	10-50	25-70
	Cross-sectional range (mm ²)			95**				95**
	Conductor diameter (mm)	5.7-12.5	4.1-11			4.8-12.5	3.6-8	
BLMT-35/150-XX	Cross-sectional range (mm ²)	35-150	35-150	50-95	50-120	35-150	35-50	50-95
	Cross-sectional range (mm ²)			120*-150**				120*-150**
	Conductor diameter (mm)	6.8-15	6.5-14			6.6-15	6.5-8	
BLMT-95/240-XX	Cross-sectional range (mm ²)	70-240	95-300	95-150	95-150	70-240		95-150
	Cross-sectional range (mm ²)			185*-240**	185(90°)			185*-240**
	Conductor diameter (mm)	9.3-19.2	10.5-19			9.3-19.2		
BLMT-120/300-XX	Cross-sectional range (mm ²)	120-300	150-300	120-185	120-240	120-300		120-185
	Cross-sectional range (mm ²)			240*-300**				240*-300**
	Conductor diameter (mm)	12.7-23.1	12.9-19.8			12.7-22.6		
BLMT-185/400-XX	Cross-sectional range (mm ²)	185-400	185-400	185-240	185-240	185-400		185-240
	Cross-sectional range (mm ²)			300*-400**	300(90°)			300*-400**
	Conductor diameter (mm)	15.5-24.6	14.8-24.6			15.5-24.6		
BLMT-500/630-XX	Cross-sectional range (mm ²)				500-630	500-630		500-630
	Cross-sectional range (mm ²)							
	Conductor diameter (mm)	25.3-32.5	24.0-28.4			25.3-32.5		
BLMT-800-XX	Cross-sectional range (mm ²)	800	800			800		
	Cross-sectional range (mm ²)							
	Conductor diameter (mm)	32.5-35.3	30.9-32.1			32.5-35.3		



* - slightly rounded with pliers

** - pressed round

XX - Palm hole

Ordering information – Dimensions – Selection tables

Mechanical connectors

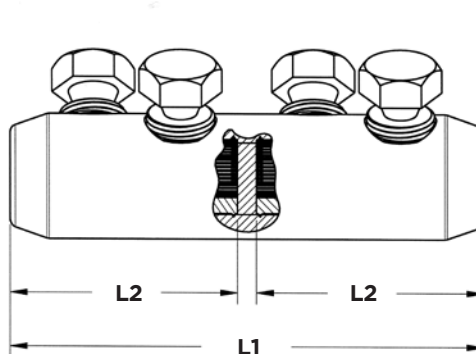

Dimensions

Product reference	Cross-sectional range mm ²	Blocked	Dimensions mm				Contact bolts Quantity	Head size mm	AF mm	TCPN
			L1	L2	D1	D2				
BSMB-10/35	10-35	yes	45	20	19	8.5	2	10		F37826-000
BSM-25/95	25-95	yes	65	30	24	12.8	2	13		C85068N001
BSM-25/95-U	25-95	no	65		24	12.8	2	13		F40757N001
BSMB-35/150	35-150	yes	80	35	28	15.8	2	17		E05256N001
BSMU-35/150	35-150	no	80		28	15.8	2	17		A84872N001
BSM-95/240	95-240	yes	125	60	33	20	4	19		695012N001
BSM-95/240-U	95-240	no	125		33	20	4	19		E96021N001
BSMB-95/240-34	95-240	yes	125	60	34	22	4	19		C26220N001
BSMB-120/300	120-300	yes	140	65	37	24	4	22		C73113N001
BSMU-120/300	120-300	no	140		37	24	4	22		E22606N001
BSM-185/400	185-400	yes	170	80	42	25.5	6	22		E84715N001
BSM-185/400-U	185-400	no	170		42	25.5	6	22		E86032N001
BSMB-500 mk2	500	yes	160	70	46	30	6	13		2107355-1
BSMB-630 mk2	630	yes	160	70	50	33	6	13		2107246-1
BSMB-800 mk2	800	yes	180	85	56	36	8	13		2107308-1
BSMB-1000	1000	yes	180	85	60	40	8	13		206792-1

Ordering information – Selection tables

Mechanical connectors



Selection and application table


Product reference		Application range						
		Conductor type						
		Al circular stranded	Al circular solid	Al sector stranded	Al sector solid	Cu circular stranded	Cu circular solid	Cu sector stranded
BSMB-10/35	Cross-sectional range (mm²)	10-35	10-50	10-25	10-35	10-35	10-35	10-25
	Cross-sectional range (mm²)			35**				35**
	Conductor diameter (mm)	3.7-7.5	3.4-7.8			3.7-7.5	3.4-6.7	
BSM-25/95 BSMU-25/95-U	Cross-sectional range (mm²)	25-95	16-95	25-70		16-95	10-50	25-70
	Cross-sectional range (mm²)			95**				95**
	Conductor diameter (mm)	5.7-12.5	4.1-11			4.8-12.5	3.6-8	
BSMB-35/150 BSMU-35/150	Cross-sectional range (mm²)	35-150	35-150	50-95	50-120	35-150	35-50	50-95
	Cross-sectional range (mm²)			120*-150**				120*-150**
	Conductor diameter (mm)	6.8-15	6.5-14			6.6-15	6.5-8	
BSM-95/240 BSMU-95/240-U	Cross-sectional range (mm²)	70-240	95-300	95-150	95-150	70-240		95-150
	Cross-sectional range (mm²)			185*-240**	185(90°)			185*-240**
	Conductor diameter (mm)	9.3-19.2	10.5-19			9.3-19.2		
BSMB-95/240-34	Cross-sectional range (mm²)	95-240	95-240	95-150	95-185	95-240		95-150
	Cross-sectional range (mm²)			185-240*				185-240*
	Conductor diameter (mm)	11-20.8	10.5-18			11-19.2		
BSMB-120/300 BSMU-120/300	Cross-sectional range (mm²)	120-300	150-300	120-185	120-240	120-300		120-185
	Cross-sectional range (mm²)			240*-300**				240*-300**
	Conductor diameter (mm)	12.7-23.1	12.9-19.8			12.7-22.6		
BSM-185/400 BSMU-185/400-U	Cross-sectional range (mm²)	185-400	185-400	185-240	185-240	185-400		185-240
	Cross-sectional range (mm²)			300*-400**	300(90°)			300*-400**
	Conductor diameter (mm)	15.5-24.6	14.8-24.6			15.5-24.6		
BSMB-500 mk2	Cross-sectional range (mm²)	500	500			500		
	Cross-sectional range (mm²)							
	Conductor diameter (mm)	25.3-28.9	24-25.1			25.3-28.6		
BSMB-630 mk2	Cross-sectional range (mm²)	630	630			630		
	Cross-sectional range (mm²)							
	Conductor diameter (mm)	28.7-32.5	27.3-28.4			28.7-32.5		
BSMB-800 mk2	Cross-sectional range (mm²)	800	800			800		
	Cross-sectional range (mm²)							
	Conductor diameter (mm)	32.5-35.3	30.9-32.1			32.5-35.3		
BSMB-1000	Cross-sectional range (mm²)	1000	1000			1000		
	Cross-sectional range (mm²)							
	Conductor diameter (mm)	37-39.5	34.8-36			37-39.5		

* - slightly rounded with pliers

** - pressed round

Ordering information - Dimensions - Selection tables

Reduction connectors

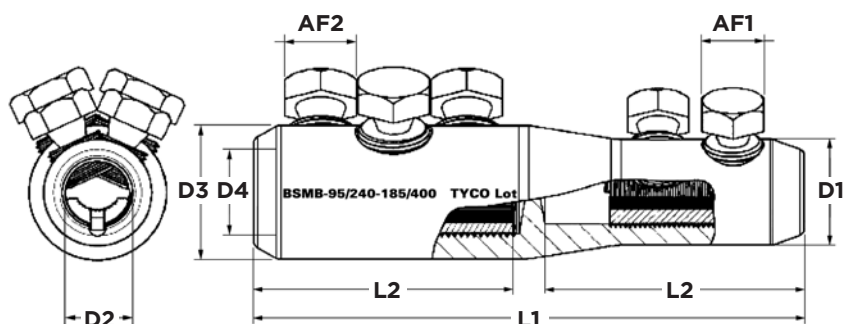

Dimensions

Product reference	Cross-sectional range		Blocked	Dimensions							Contact bolts Quantity	Head size AF mm	Contact bolts Quantity	Head size AF mm	TCPN
	mm ² Side1	mm ² Side2		L1	L2	D1	D2	D3	D4						
BSMB 25/95-95/240	25-95	95-240	yes	125	60	24	12.8	33	20	1	13	2	19		877438NO
BSMB 95/240-185/400	95-240	185-400	yes	170	80	33	20	42	25.5	2	19	3	22		A54098NO
BSMB 185/400-500	185-400	500	yes	190	90	42	25.5	46	30	3	22	3	27		CB8267NO
BSMB 185/400-630	185-400	630	yes	200	95	42	25.5	50	33	3	22	3	27		CB8264NO
BSMB 500-630 mk2	500	630	yes	160	70	46	30	50	33	3	13	3	13		2107373-1
BSMB 500-800	500	800	yes	180	85	46	30	56	36	3	13	4	13		2107370-1
BSMB 630-800 mk2	630	800	yes	180	85	50	33	56	36	3	13	4	13		2107357-1
BSMB 630-1000	630	1000	yes	180	85	50	33	60	40	3	13	4	13		2107346-1
BSMB 800-1000	800	1000	yes	180	85	56	36	60	40	3	13	4	13		2107484-1

Ordering information – Dimensions – Selection tables

Reduction connectors

Selection and application table

Product reference BSMB		Application range Conductor type						
		Al circular stranded	Al circular solid	Al sector stranded	Al sector solid	Cu circular stranded	Cu circular solid	Cu sector stranded
25/95-95/240								
25-95mm ² Side	Cross-sectional range (mm ²)	25-95	16-95	25-70		16-95	10-50	25-70
	Cross-sectional range (mm ²)			95*				95*
	Conductor diameter (mm)	5.7-12.5	4.1-11			4.8-12.5	3.6-8	
95-240mm ² Side	Cross-sectional range (mm ²)	70-240	95-300	95-150	95-150	70-240		95-150
	Cross-sectional range (mm ²)			185*-240*	185(90°)			185*-240*
	Conductor diameter (mm)	9.3-19.2	10.5-19			9.3-19.2		
95/240-185/400								
95-240mm ² Side	Cross-sectional range (mm ²)	70-240	95-300	95-150	95-150	70-240		95-150
	Cross-sectional range (mm ²)			185*-240*	185(90°)			185*-240*
	Conductor diameter (mm)	9.3-19.2	10.5-19			9.3-19.2		
185-400mm ² Side	Cross-sectional range (mm ²)	185-400	185-400	185-240	185-240	185-400		185-240
	Cross-sectional range (mm ²)			300*-400*	300(90°)			300*-400*
	Conductor diameter (mm)	15.5-24.6	14.8-24.6			15.5-24.6		
185/400-500								
185-400mm ² Side	Cross-sectional range (mm ²)	185-400	185-400	185-240	185-240	185-400		185-240
	Cross-sectional range (mm ²)			300*-400*	300(90°)			300*-400*
	Conductor diameter (mm)	15.5-24.6	14.8-24.6			15.5-24.6		
500mm ² Side	Cross-sectional range (mm ²)	500	500			500		
	Cross-sectional range (mm ²)							
	Conductor diameter (mm)	25.3-28.9	24-25.1			25.3-28.6		
185/400-630								
185-400mm ² Side	Cross-sectional range (mm ²)	185-400	185-400	185-240	185-240	185-400		185-240
	Cross-sectional range (mm ²)			300*-400*	300(90°)			300*-400*
	Conductor diameter (mm)	15.5-24.6	14.8-24.6			15.5-24.6		
630mm ² Side	Cross-sectional range (mm ²)	630	630			630		
	Cross-sectional range (mm ²)							
	Conductor diameter (mm)	28.7-32.5	27.3-28.4			28.7-32.5		
500-630								
500mm ² Side	Cross-sectional range (mm ²)	500	500			500		
	Cross-sectional range (mm ²)							
	Conductor diameter (mm)	25.3-28.9	24-25.1			25.3-28.6		
630mm ² Side	Cross-sectional range (mm ²)	630	630			630		
	Cross-sectional range (mm ²)							
	Conductor diameter (mm)	28.7-32.5	27.3-28.4			28.7-32.5		

* - pressed round

Ordering information – Dimensions – Selection tables

Reduction connectors

Selection and application table

Product reference		Application range						
		Conductor type		Al sector stranded	Al sector solid	Cu circular stranded	Cu circular solid	Cu sector stranded
BSMB		Al circular stranded	Al circular solid					
500-800								
500mm ² Side	Cross-sectional range (mm ²)	500	500			500		
	Cross-sectional range (mm ²)							
	Conductor diameter (mm)	25.3-28.9	24-25.1			25.3-28.9		
800mm ² Side	Cross-sectional range (mm ²)	800	800			800		
	Cross-sectional range (mm ²)							
	Conductor diameter (mm)	32.5-35.3	30.9-32.1			32.5-35.3		


Product reference								
BSMB								
630-800								
630mm ² Side	Cross-sectional range (mm ²)	630	630			630		
	Cross-sectional range (mm ²)							
	Conductor diameter (mm)	28.7-32.5	27.3-28.4			28.7-32.5		
800mm ² Side	Cross-sectional range (mm ²)	800	800			800		
	Cross-sectional range (mm ²)							
	Conductor diameter (mm)	32.5-35.3	30.5-32.1			32.5-35.3		

Product reference								
BSMB								
630-1000								
630mm ² Side	Cross-sectional range (mm ²)	630	630			630		
	Cross-sectional range (mm ²)							
	Conductor diameter (mm)	28.7-32.5	27.3-28.4			28.7-32.5		
1000mm ² Side	Cross-sectional range (mm ²)	1000	1000			1000		
	Cross-sectional range (mm ²)							
	Conductor diameter (mm)	37-39.5	34.8-36			37-39.5		

Product reference								
BSMB								
800-1000								
800mm ² Side	Cross-sectional range (mm ²)	800	800			800		
	Cross-sectional range (mm ²)							
	Conductor diameter (mm)	32.5-35.3	30.5-32.1			32.5-35.3		
1000mm ² Side	Cross-sectional range (mm ²)	1000	1000			1000		
	Cross-sectional range (mm ²)							
	Conductor diameter (mm)	37-39.5	34.8-36			37-39.5		

Ordering information – Dimensions – Selection tables

Split connectors

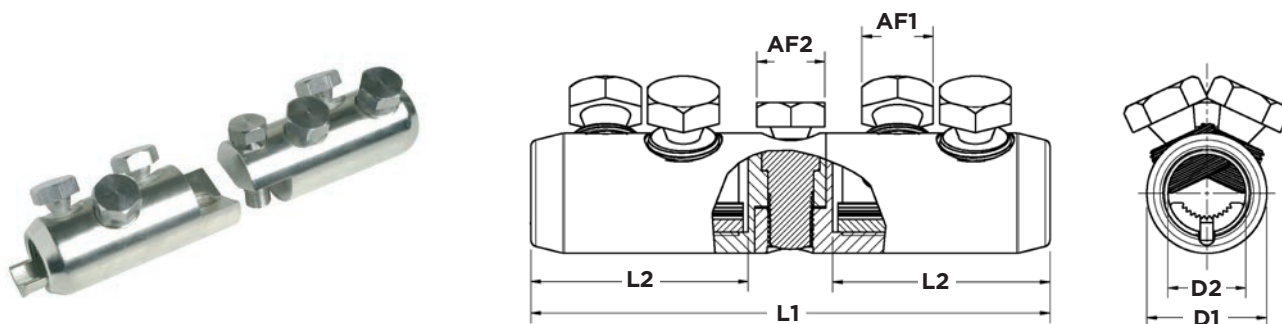

Dimensions

Product reference	Cross-sectional range mm ²	Blocked	Dimensions mm				Contact bolts		Central bolt		TCPN
			L1	L2	D1	D2	Quantity	Head size AF1 mm	Quantity	Head size AF2 mm	
BSMV-120/300	120-300	yes	160	65	37	24	4	22	1	21	CB8256NO
BSMV-185/400	185-400	yes	190	80	42	25.5	6	22	1	19	CB8261NO



Selection and application table

Product reference		Application range						
		Conductor type						
		Al circular stranded	Al circular solid	Al sector stranded	Al sector solid	Cu circular stranded	Cu circular solid	Cu sector stranded
BSMV-120/300	Cross-sectional range (mm ²)	120-300	150-300	120-185	120-240	120-300		120-185
	Cross-sectional range (mm ²)			240*-300*				240*-300*
	Conductor diameter (mm)	12.7-23.1	12.9-19.8			12.7-22.6		
BSMV-185/400	Cross-sectional range (mm ²)	185-400	185-400	185-240	185-240	185-400		185-240
	Cross-sectional range (mm ²)			300*-400*	300(90°)			300*-400*
	Conductor diameter (mm)	15.5-24.6	14.8-24.6			15.5-24.6		

* - pressed round

Ordering information – Dimensions – Selection tables

Mechanical repair sleeves

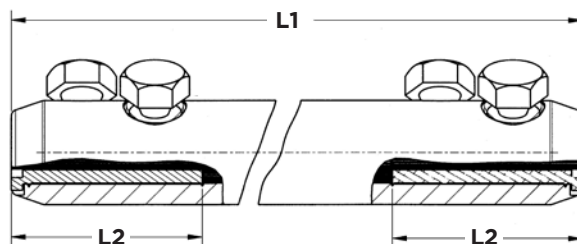

Dimensions

Product reference	Cross-sectional range mm ²	Blocked	Dimension mm				Contact bolts Quantity	Head size AF mm	TCPN
			L1	L2	D1	D2			
BSM-25/95-U-L440	25-95	no	440	30	24	12.8	2	13	E93177N001
BSM-95/240-U-L440	95-240	no	440	60	33	20	4	19	E77313N001
BSMU-95/240-34-L440	95-240	no	440	60	34	22	4	19	F90026N002
BSMU-120/300-L440	120-300	no	440	65	37	24	4	22	CA6616N001
BSM-185/400-U-L440	185-400	no	440	80	42	25.5	6	22	D74176-000
BSMU-500-L440 mk2	500	no	440	70	46	30	6	13	2107432-1

Selection and application table

Product reference		Application range						
		Conductor type						
		Al circular stranded	Al circular solid	Al sector stranded	Al sector solid	Cu circular stranded	Cu circular solid	Cu sector stranded
BSM-25/95-U-L440	Cross-sectional range (mm ²)	25-95	16-95	25-70		16-95	10-50	25-70
	Cross-sectional range (mm ²)			95*				95*
	Conductor diameter (mm)	5.7-12.5	4.1-11			4.8-12.5	3.6-8	
BSM-95/240-U-L440	Cross-sectional range (mm ²)	70-240	95-300	95-150	95-150	70-240		95-150
	Cross-sectional range (mm ²)			185*-240*	185(90°)			185*-240*
	Conductor diameter (mm)	9.3-19.2	10.5-19			9.3-19.2		
BSMU-95/240-34-L440	Cross-sectional range (mm ²)	95-240	95-300	95-150	95-185	95-240		95-150
	Cross-sectional range (mm ²)			185*-240*				185*-240*
	Conductor diameter (mm)	11-20.8	10.5-19.8			11-19.2		
BSMU-120/300-L440	Cross-sectional range (mm ²)	120-300	150-300	120-185	120-240	120-300		120-185
	Cross-sectional range (mm ²)			240*-300*				240*-300*
	Conductor diameter (mm)	12.7-23.1	12.9-19.8			12.7-22.6		
BSM-185/400-U-L440	Cross-sectional range (mm ²)	185-400	185-400	185-240	185-240	185-400		185-240
	Cross-sectional range (mm ²)			300*-400*	300(90°)			300*-400*
	Conductor diameter (mm)	15.5-24.6	14.8-24.6			15.5-24.6		
BSMU-500-L440	Cross-sectional range (mm ²)	500	500			500		
	Cross-sectional range (mm ²)							
	Conductor diameter (mm)	25.3-28.9	24-25.1			25.3-28.6		

* - pressed round

Ordering information – Dimensions – Selection tables Accessories

Support tool



Product reference	Description
IT 1000-019	Support tool for mechanical connectors and lugs Grip length: 205 mm For diameters ranging from 16 to 60 mm

Cordless impact wrench



Product reference	Description
IT-1000-033	Installation tool for shear-head bolt connectors and lugs

Filling mastic



Product reference	Description
EPPA-048-Clay-Pack	Mastic for profiling over bolt area Quantity 30 ± 5 g

Notes:

Notes:

TE Connectivity (NYSE: TEL) is a \$14 billion global technology leader. Our connectivity and sensor solutions are essential in today's increasingly connected world. We collaborate with engineers to transform their concepts into creations – redefining what's possible using intelligent, efficient and high-performing TE products and solutions proven in harsh environments. Our 80,000 people, including 7,500 design engineers, partner with customers in over 150 countries across a wide range of industries. We believe EVERY CONNECTION COUNTS – www.TE.com

- Mining
- Nuclear power plants
- OEMs
- Overhead distribution
- Petrochemical plants
- Railways
- Street lighting
- Substations
- Transmission lines
- Underground distribution
- Windfarms
- Solar
- Hydro-electric

WHEREVER ELECTRICITY FLOWS, YOU'LL FIND TE ENERGY



te.com/energy

FOR MORE INFORMATION:

TE Technical Support Centers

France:	+ 33 380 583 200	Italy:	+ 39 333 2500 915
Germany:	+ 49 896 089 903	Poland and Baltics:	+ 48 224 576 753
UK:	+ 44 8 708 707 500	Czech Republic:	+ 42 0 272 011 102
Spain:	+ 34 916 630 400	Sweden and Norway:	+ 46 850 725 057
Benelux:	+ 32 16 351 731	Middle East:	+ 971 4 2 117 000
Denmark:	+ 45 43 480 424	USA:	+ 1 800 327 6996

te.com/energy

©2015 TE Connectivity Ltd. family of companies. All Rights Reserved. EPP-1233-FR-5/15

Bowthorpe EMP, Raychem, Simel, VESA, TE Connectivity and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, product and Company names mentioned herein may be trademarks of their respective owners. While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this brochure are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.