



Cable Breakouts **For Terminating and Sealing** **Low Voltage Power Cables**

Application

Tank heat-shrinkable cable breakouts are manufactured from a high quality cross linked polymer compound.

The breakouts are suitable for terminating and sealing low voltage cables, plastic, paper and rubber.

The breakouts are internally coated with a hot melt adhesive, which forms a seal against the ingress of moisture into the crutch area.


They are UV stabilized, giving excellent ageing stability and very good resistance against chemical attack.

Features


- High tensile strength and ultimate elongation
- Excellent stability of form
- Unlimited shelf life
- High shrink ratios
- High UV resistance
- Good weatherability
- Good chemical resistance against salts - acids - alkali's and solvents



TECHNICAL INFORMATION

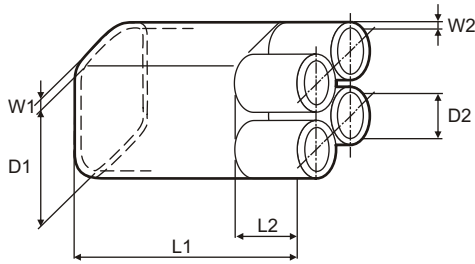

EN 4 36/18

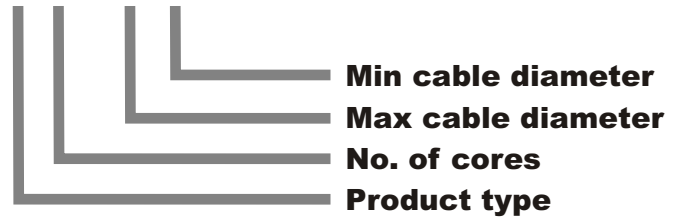

Part Code	Description	TYPE	D1 COATED mm	D1* mm	D2 COATED mm	D2* mm	L2 mm	L1* mm	W1* mm	W2 mm	CABLE CONDUCTOR SIZE mm
●	PH200-0210 Breakout LV TEN 2-30/8	EN2 30/8	30	8	12	3	16	90	2.7	2	1-25
	PH200-0220 Breakout LV TEN 2-60/23	EN2 60/23	60	23	25	8	25	160	3.5	3	35-150
●	PH200-0310 Breakout LV TEN 3-25/10	EN3 25/10	25	10	9	2	15	70	2.5	1.8	1-10
	PH200-0315 Breakout LV TEN 3-35/17	EN3 35/17	35	17	12	4.5	23	100	2.1	2.1	6-35
	PH200-0320 Breakout LV TEN 3-55/25	EN3 55/25	55	25	25	8	45	175	3.5	3	35-120
	PH200-0325 Breakout LV TEN 3-75/38	EN3 75/38	75	38	29	8	55	215	3.8	3.5	95-240
	PH200-0335 Breakout LV TEN 3-90/40	EN3 90/40	90	40	40	12	45	230	4	3.5	150-300
●	PH200-0340 Breakout LV TEN 3-110/40	EN3 110/50	110	50	46	18	65	250	4	3.5	185-300
	PH200-0405 Breakout LV Ten 4-22/9	EN4 22/9	22	9	6	1.5	15	65	2	2	1-4
	PH200-0410 Breakout LV Ten 4-28/12	EN4 28/12	28	12	9	1.8	17	70	2.7	2	2.5-10
	PH200-0415 Breakout LV Ten 4-36/18	EN4 36/18	36	18	13	4	22	100	3	2.5	6-35
	PH200-0420 Breakout LV Ten 4-52/21	EN4 52/21	52	21	20	8	35	150	3.5	3	16-50
	PH200-0425 Breakout LV Ten 4-60/25	EN4 60/25	60	25	20	5.5	30	170	3.5	3	25-150
	PH200-0426 Breakout LV Ten 4-60/25-2	EN4 60/25	60	25	25	5.5	28	225	3.5	3	25-150
	PH200-0430 Breakout LV Ten 4-75/32	EN4 75/32	75	32	33	11	45	175	4	3.5	70-185
	PH200-0435 Breakout LV Ten 4-90/40	EN4 90/40	90	40	35	10	45	230	4	3.5	120-300
PH200-0440 Breakout LV Ten 4-110/47	EN4 110/47	110	47	38	12	55	200	4	3.50	120-300	

Colour: Black

Approval: VDE - SEV - ESI

Availability: Individual items available dimensions as above